

LC Series


DALI Dimming LED Driver

DALI调光LED恒流驱动器

Features:

- DALI 2 certified LED driver
- Dimmable with DALI signal
- Super slim design
- Driver for built-in use
- Configurable constant current output via dip-switch
- Switch-Dim function
- For use in luminaires of protection class I
- Dimming range 1...100%
- Analogue flicker-free dimming
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Suitable for use in emergency lighting systems
- Protection class I

- DALI 2认证LED驱动
- 适用DALI调光系统
- 超细长紧凑设计
- 内置式驱动
- 通过拨码开关选择输出电流
- Switch调光功能
- 适用I类灯具
- 调光范围1...100%光输出
- 无频闪调光
- 输出开路, 短路, 过载和超温保护
- 适用紧急照明控制系统
- 保护等级 I

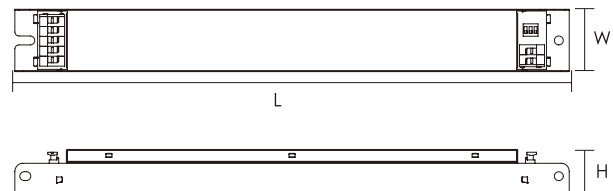

Parameters:

Model No.	Input voltage	Max. output power	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	(W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
LC-45D	220-240	24.5	350	25-70	0.90C	<25	87	<0.5	-20...+50	80	SELV	280x31.5x22	230
		28	400	25-70	0.90C	<25	87						
		35	500	25-70	0.95	<15	87						
		42	600	25-70	0.95	<15	87						
		45	700	25-64	0.95	<15	87						
		45	800	25-56	0.95	<15	87						
		45	900	25-50	0.95	<15	87						
LC-60D	220-240	60	1000	20-60	0.95	<15	89	<0.5	-20...+50	80	SELV	360x30x21	280
		60	1050	20-57	0.95	<15	89						
		60	1100	20-55	0.95	<15	89						
		60	1200	20-50	0.95	<15	89						
		60	1300	20-46	0.95	<15	88						
		60	1400	20-43	0.95	<15	88						
		60	1500	20-40	0.95	<15	88						
LC-75D	220-240	70	1000	25-70	0.95	<15	89	<0.5	-20...+50	80	SELV	360x30x21	280
		73.5	1050	25-70	0.95	<15	89						
		75	1100	25-68	0.95	<15	89						
		75	1200	25-62	0.95	<15	89						
		75	1300	25-57	0.95	<15	88						
		75	1400	25-54	0.95	<15	88						
		75	1500	25-50	0.95	<15	88						
75	1600	25-47	0.95	<15	88								

