

LI Series


DALI Dimming LED Driver

DALI调光LED恒流驱动器

Features:

- DALI 2 certified LED driver
- Dimmable with DALI signal
- Independent slim design
- Configurable constant current output via dip-switch
- Switch-Dim function
- Dimming range 1...100%
- Analogue flicker-free dimming
- Open circuit, short circuit, over load protection
- Suitable for use in emergency lighting systems
- Protection class II

- DALI 2认证LED驱动
- 适用DALI调光系统
- 独立式细长紧凑设计
- 通过拨码开关选择输出电流
- Switch调光功能
- 调光范围1...100%光输出
- 无频闪调光
- 输出开路, 短路, 过载和超温保护
- 适用紧急照明控制系统
- 保护等级 II

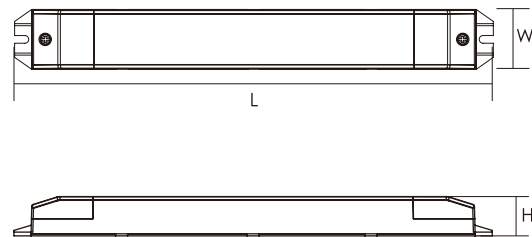

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 t _a (°C)	Max. casing temperature 最大外壳温度 t _c (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
LI-45D	220-240	24.5	350	25-70	0.90C	<25	87	<0.5	-20...+50	80	SELV	320x35x23	160
		28	400	25-70	0.90C	<25	87						
		35	500	25-70	0.95	<15	87						
		42	600	25-70	0.95	<15	87						
		45	700	25-64	0.95	<15	88						
		45	800	25-56	0.95	<15	87						
		45	900	25-50	0.95	<15	87						
		45	1000	25-45	0.95	<15	87						