

IE Series


DALI Dimming LED Driver

DALI调光LED恒流驱动器

Features:

- DALI 2 certified LED driver
- Dimmable with DALI signal
- Independent compact design
- Configurable constant current output via dip-switch
- Switch-Dim function
- Dimming range 1...100%
- Analogue flicker-free dimming
- Open circuit, short circuit, over load protection
- Suitable for use in emergency lighting systems
- Protection class II

- DALI 2认证LED驱动
- 适用DALI调光系统
- 独立式紧凑型设计
- 通过拨码开关选择输出电流
- Switch调光功能
- 调光范围1...100%光输出
- 无频闪调光
- 输出开路, 短路, 过载和超温保护
- 适用紧急照明控制系统
- 保护等级II

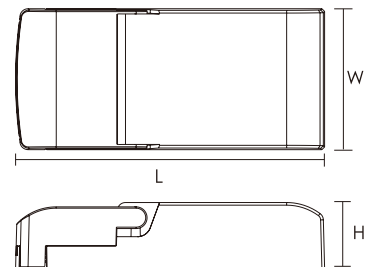

Parameters:

Model No.	Input voltage	Max. output power	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
IE-12D	220-240	12	180	22-67	0.95	<15	83	<0.5	-20...+50	80	SELV	114x52x24	110
		12	230	22-52	0.95	<15	83						
		12	260	22-46	0.95	<15	83						
		12	300	22-40	0.95	<15	83						
		12	350	12-34	0.95	<15	83						
		12	400	12-30	0.95	<15	83						
		12	450	12-27	0.95	<15	83						
IE-25D	220-240	20	350	20-60	0.90C	<25	86	<0.5	-20...+50	80	SELV	114x52x24	118
		24	400	20-60	0.95	<15	86						
		25	450	20-55	0.95	<15	85						
		25	500	20-50	0.95	<15	85						
		25	550	20-45	0.95	<15	85						
		25	600	20-42	0.95	<15	85						
		25	650	20-38	0.95	<15	85						
		25	700	20-36	0.95	<15	85						

