

EMF5 4500


Fluorescent Emergency Light Kit

荧光灯应急控制模组

Features:

- Suitable to use with electronic and magnetic ballast
- Suitable types of fluorescent lamp: Circular, PL, 2D, Linear etc
- Intelligent automatic recharging function
- Fitted with 70°C high temperature Ni-Cd large capacity battery(4.5Ah)
- Provide enduring 3-hour backup electric power
- LED charging state indicator
- Push button for testing
- Easy installation

- 荧光灯用，适用电子镇流器和电感镇流器
- 适用荧光灯光源：环管，插拔管，直管，2D管
- 智能自动充电功能
- 内含70°C 高温型大容量4.5安时镍镉电池
- 提供长达3小时的备用电源
- LED充电状态指示
- 测试按钮自检功能
- 安装简单，适用更多的灯具及场所

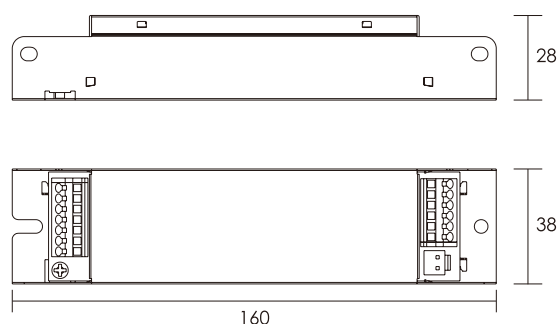

Parameters:

| Technical Data 技术参数 | EMF5 4500 |
|-----------------------------------|-------------------------|
| Rated supply voltage 输入额定电压 | 220-240V~ |
| Frequency 额定频率 | 50/60Hz |
| Input current 输入电流 | 40mA |
| Charge current 充电电流 | 260mA |
| Recharge hours 充电时间 | 24h |
| EM Lamp 应急光源 | Fluorescent lamps 4-80W |
| Ambient temperature ta 环境温度 | 0..+50°C |
| Max. casing temperature tc 最大外壳温度 | 75°C |
| Battery type 电池 | Ni-Cd 6V 4500mAh |
| Dimensions LxWxH 尺寸 | 160x38x28mm |
| Fixing centre D 安装孔距 | 150mm |