

UTA Series


Constant Voltage LED Driver

LED恒压驱动器

Features:

- Independent ultrathin design
- Primary and secondary sides come with leads
- Protections: opencircuit, shortcircuit, overload, overtemperature
- IP44 design
- SELV equivalent
- Protection class II

- 独立式超薄紧凑设计
- 输入输出端引线型
- 输出开路, 短路, 过载和超温保护
- IP44等级设计
- 符合安全特低电压标准
- 保护等级 II

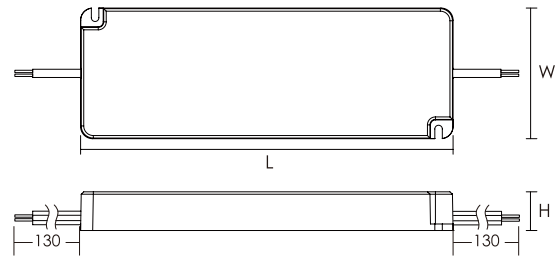

Parameters:

| Model No. 型号 | Input voltage 额定电压 (V) | Max. output 功率 (W) | Output voltage 输出电压 (V) | Output current 输出电流 (A) | Power factor 功率因数 (λ) | Efficiency full load 效率 (%) | No-load power 空载功率 (W) | Ambient temperature 环境温度 ta (°C) | Max. casing temperature 最大外壳温度 tc (°C) | Isolation 隔离 | Dimensions LxWxH 尺寸 (mm) | Weight 重量 (g) |
|-----------------|------------------------------|--------------------------|-------------------------------|-------------------------------|-----------------------------|-----------------------------------|------------------------------|--|--|-----------------|-----------------------------------|---------------------|
| UTA-30-12 | 220-240 | 30 | 12 | 0-2.5 | 0.95 | 84 | <0.5 | -20...+40 | 85 | SELV | 154x54x16 | 130 |
| UTA-30-24 | 220-240 | 30 | 24 | 0-1.25 | 0.95 | 85 | <0.5 | -20...+40 | 85 | SELV | 154x54x16 | 130 |


CB CE IP44