

## CV Series


## Constant Voltage LED Driver

LED恒压驱动器

## Features:

- Super thin design
- Independent compact design
- Input and output terminal blocks on the same side
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II

- 超薄紧凑型设计
- 超小体积，独立式紧凑型设计
- 同侧输入和输出端接线端子
- 输出开路，短路，过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 保护等级 II

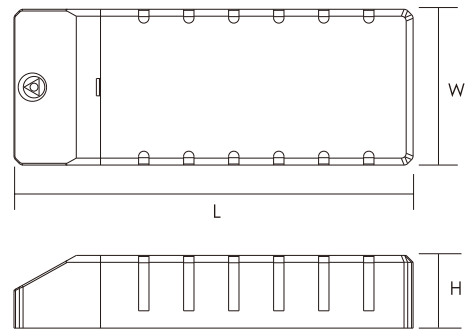

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output voltage 输出电压 (V)	Output current 输出电流 (A)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions 尺寸 LxWxH (mm)	Weight 重量 (g)
CV1218	220-240	18	12	0-1.5	0.80C	81	<0.5	-20...+50	85	SELV	115x45x21	85
CV2418	220-240	18	24	0-0.75	0.80C	83	<0.5	-20...+50	85	SELV	115x45x21	85