

Mini Series


Electronic Transformer

电子变压器

Features:

- Electronic transformer for 12V halogen lamp as well as other type of low loading lamps which require supply of 12V ac LED lamp
- Captured terminal screws
- High efficiency(94%)
- Safe no-load operation
- Overload & short circuit protection with self resetting
- Dimmable with leading edge or trailing edge dimmer
- Thermally stable and shatter-proof plastic casings
- Long converter life=50,000 hours
- Simple installation

- 12V低电压卤素灯用电子变压器或其他低功耗12V ac LED灯
- 螺丝锁紧大接线端子, 方便多种规格线驳接
- 节能, 高效率94%
- 安全无负载保护装置
- 过载及短路异常保护, 自动重启
- 适用前切相和后切相调光器
- 耐热阻燃及高强度工程塑胶外壳材料
- 50000小时长寿命设计
- 安装经济简单

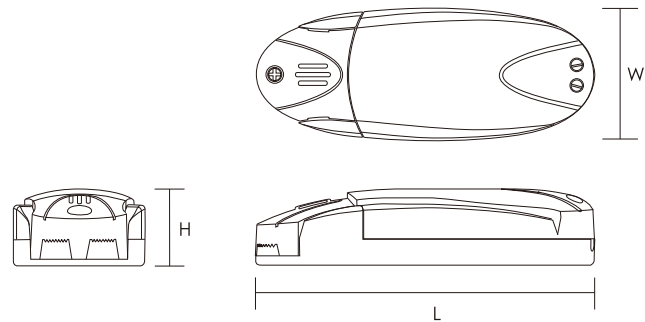

Parameters:

Type	Unit	MINI60	MINI70	MINI105
类型	单位	20-60W	20-70W	35-105W
Rated supply voltage 输入额定电压	V	220-240	220-240	220-240
Frequency 额定频率	Hz	50/60	50/60	50/60
Input current 输入电流	A	0.26	0.29	0.44
Secondary voltage 输出电压	V	11.5	11.5	11.5
Lamp wattage 灯功率	W	20-60	20-70	35-105
Efficiency 效率	%	>95	>95	>95
Power factor 功率因数	λ	≥ 0.99	≥ 0.99	≥ 0.98
Input capacitance 输入电容	nF	33	100	200
Operating temperature ta 环境温度	°C	50	50	50
Max. casing temperature tc 最大外壳温度	°C	80	80	80
Dimming 适用调光器 For LED Lamp, Proper matching between dimmer, lamp, and driver is required		Leading and trailing edge dimmers	Leading and trailing edge dimmers	Leading and trailing edge dimmers
Primary terminal 输入接线端子		2-pole, screw terminal Dia.3.5mm	2-pole, screw terminal Dia.3.5mm	2-pole, screw terminal Dia.3.5mm
Secondary terminal 输出接线端子		2-pole, screw terminal Dia.3.2mm	2-pole, screw terminal Dia.3.2mm	2-pole, screw terminal Dia.3.2mm
Dimensions LxWxH 尺寸	mm	109x42x24	109x42x24	124x48x28
Weight 重量	g	80	80	120