

VENUS Series




Electronic Transformer

电子变压器

Features:

- Electronic transformer for 12V halogen lamp
- Electrician friendly design
- Easy separate looping terminals
- Captured terminal screws
- Easy press cable lock
- Light weight
- High efficiency(95%)
- Safe no-load operation
- Overload & short circuit protection with self resetting
- Over temperature cut off
- Dimmable with leading edge or trailing edge dimmer
- Thermally stable and shatter-proof plastic casings
- Long converter life=60,000 hours

- 12V低电压卤素灯用电子变压器
- 时尚外观, 电工易用设计
- 内置2组并联输入接线端子, 方便驳接
- 简便自锁式压线盖
- 比传统电感变压器重量轻
- 节能, 高效率95%
- 安全无负载保护装置
- 过载及短路异常保护, 自动重启
- 超温保护
- 适用前切相和后切相调光器
- 耐热阻燃及高强度工程塑胶外壳材料
- 60000小时长寿命设计

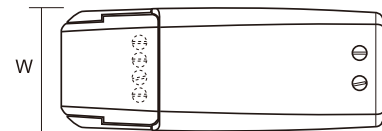

Parameters:

Type 类型	Unit 单位	VENUS60 20-60W	VENUS70 20-70W
Rated supply voltage 输入额定电压	V	220-240	220-240
Frequency 额定频率	Hz	50/60	50/60
Input current 输入电流	A	0.26	0.26
Secondary voltage 输出电压	V	11.5	11.5
Lamp wattage 灯功率	W	20-60	20-70
Efficiency 效率	%	>95	>95
Power factor 功率因数	λ	≥ 0.99	≥ 0.99
Input capacitance 输入电容	nF	33	100
Operating temperature ta 环境温度	°C	50	50
Max. casing temperature tc 最大外壳温度	°C	80	80
Dimming 适用调光器 For LED Lamp, Proper matching between dimmer, lamp, and driver is required		Leading and trailing edge dimmers	Leading and trailing edge dimmers
Primary terminal 输入接线端子		4-pole, screw terminal Dia.3.5mm	4-pole, screw terminal Dia.3.5mm
Secondary terminal 输出接线端子		2-pole, screw terminal Dia.3.5mm	2-pole, screw terminal Dia.3.5mm
Dimensions LxWxH 尺寸	mm	109x42x25	109x42x25
Weight 重量	g	100	100

