

PW Series

TRIAC Dimming LED Driver


可控硅调光LED驱动器

Features:

- Dimmable with leading edge or trailing edge dimmer
- Independent compact design
- Easy press cable lock
- Wide output voltage extended down to 50%
- High power factor >0.95
- High efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV class II output
- Smooth dimming compatible with most dimmer
- Dimming range from 1...100%



- 适用普通可控硅前切相或后切相调光器
- 独立式紧凑型设计
- 简便自锁式压线盖
- 50%宽输出电压范围
- 高功率因数>0.95
- 高效率, 高可靠性, 长寿命
- 输出开路, 过载, 短路和过温保护
- 安装经济便捷
- SELV和II等级
- 平滑高性能调光, 匹配更多的调光器
- 调光范围 1...100%光通量

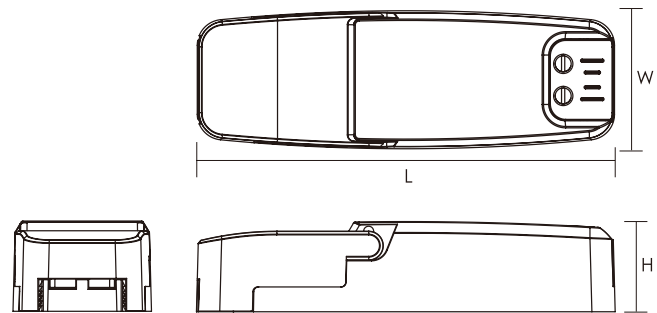

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
D18009NT-PW	220-240	9	180	25-50	0.95	83	<1.0	-20...+50	80	SELV	130x43x28	75
D23009NT-PW	220-240	9	230	21-42	0.95	82	<1.0	-20...+50	80	SELV	130x43x28	75
D35009NT-PW	220-240	9	350	13-26	0.95	82	<1.0	-20...+50	80	SELV	130x43x28	75
D50009NT-PW	220-240	9	500	9-18	0.95	80	<1.0	-20...+50	80	SELV	130x43x28	75
D70009NT-PW	220-240	9	700	7-13	0.95	80	<1.0	-20...+50	80	SELV	130x43x28	75
D25012NT-PW	220-240	12	250	24-48	0.95	83	<1.0	-20...+50	80	SELV	130x43x28	75
D30012NT-PW	220-240	12	300	20-40	0.95	83	<1.0	-20...+50	80	SELV	130x43x28	75
D50012NT-PW	220-240	12	500	12-24	0.95	82	<1.0	-20...+50	80	SELV	130x43x28	75


CB CE