

IE Series




DALI Dimming LED Driver

DALI调光LED恒流驱动器

Features:

- Dimmable with DALI signal
- Independent compact design
- Push wire connections
- Low ripple of output current for a higher quality of light
- high power factor
- Open circuit, short circuit, over load protection
- Dimming range 1...100%
- Suitable for use in emergency lighting systems

- 适用DALI调光系统
- 超小尺寸, 独立式紧凑型设计
- 按压式接线端子
- 低电流纹波输出
- 高功率因数设计
- 输出开路, 短路, 过载和超温保护
- 调光范围1...100%光输出
- 适用紧急照明控制系统

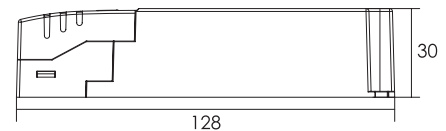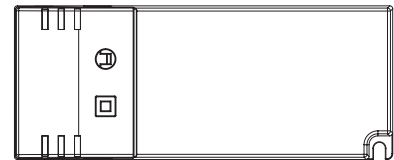

Parameters:

Model No. 型号	Dimming Mode 调光方式	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
IE-20-260D	DALI	220-240	20	260	2-57	0.95	<15	87	-20...+50	80	SELV	128x52x30	110
IE-20-350D	DALI	220-240	20	350	2-58	0.95	<15	86	-20...+50	80	SELV	128x52x30	110
IE-20-500D	DALI	220-240	20	500	2-40	0.95	<15	84	-20...+50	80	SELV	128x52x30	110
IE-20-700D	DALI	220-240	20	700	2-28	0.95	<15	83	-20...+50	80	SELV	128x52x30	110