

D350PB-M/S


Trailing Edge Lighting Dimmer

后切相可控硅调光器

Features:

- Built in on/off and push button dimming control
- No neutral required
- Protections: Overtemperature
- Adjustable minimum dimmable level
- Smooth dimming compatible with most LED fittings
- Multiple-location dimming by connecting D350PB-M with any number of secondary dimmers D350PB-S

- 带开关按压调光功能
- 安装简易快速, 无需零线连接
- 过温异常保护功能
- 最小亮度预设功能
- 平滑调光, 效果完美
- 带多路调光功能

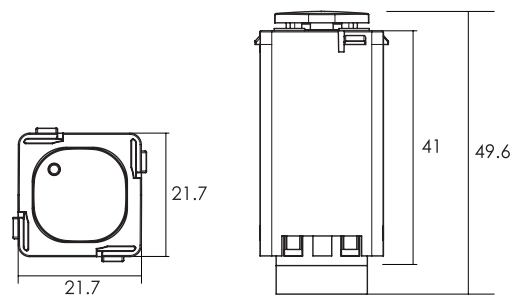

Parameters:

Model No. 型号	Dimming Mode 调光方式	Input voltage 额定电压 (V)	Load wattage 负载功率 (W)	Ambient temperature 环境温度 t_a (°C)	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
D350PB-M	Trailing edge	220-240V~ 50Hz	10-350W (1.5A max)	0...+40 °C	21.7x21.7x49.6	25
D350PB-S	Trailing edge	220-240V~ 50Hz	10-350W (1.5A max)	0...+40 °C	21.7x21.7x49.6	13

