

## D350T+PIR


## PIR Dimmer

微波感应调光器

## Features:

- PIR and daylight sensor to achieve on/off control
- Manual mode, semi-automatic and automatic function
- No neutral required, soft start
- Can replace the traditional mechanical switch
- Load range 2w to 350w
- Dimming range 1% to 100%
- Detection range up to 4.5m x Ø 5m
- Hold time adjustable from 5 seconds to 30 minutes
- Easy to install


- 红外感应和光敏感应控制开关
- 手动模式、半自动和自动模式功能
- 无需零线连接，软启动功能
- 带开关触控功能
- 负载范围2w到350w
- 调光范围1%~100%
- 感应范围达4.5m x Ø 5m
- 保持时间5秒至30分钟可调
- 安装简单

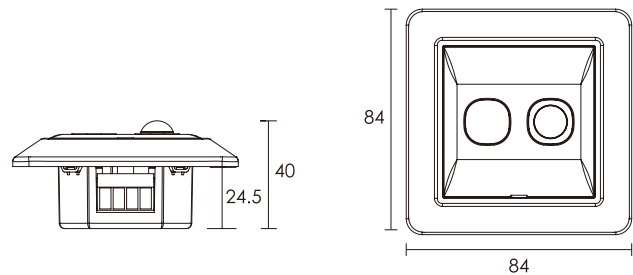

## Parameters:

Model No. 型号	Dimming Mode 调光方式	Input voltage 额定电压 (V)	Load wattage 负载功率 (W)	Hold time 保持时间	Daylight threshold 光敏感应	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
D350T+PIR	Trailing edge	220-240~50/60Hz	2-350(1.5Amax)	5S-30min	5lux-∞	84x84x40	90

## Detection Area:

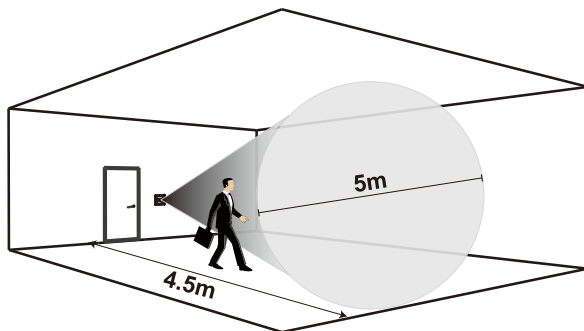

## Wiring:

