

D13-PIR


PIR Sensor Down Light

红外感应灯

Features:

- Auto switching through PIR sensor
- Daylight threshold: 10lux
- Timeout: 90 seconds
- 360° detection angle

- 红外感应开关
- 光敏感应阈值: 10lux
- 保持时间: 90秒
- 360度探测范围

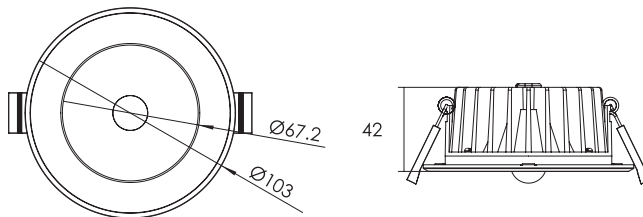

Parameters:

Input voltage 额定电压	220-240V
Power 额定功率	8W
Detection area 感应范围	4mx4m(ØxH)
Timeout 保持时间	90S
Daylight threshold 光敏阈值	10 lux
Cutout 开孔尺寸	Ø90mm
Ta 使用环境温度	0-50°C
Dimensions ØxH 尺寸	Ø103x42mm
Compatible LED driver 搭配驱动器	AcTEC Q4-350mA-12W

Power 功率 (W)	Colour Temperature 色温	Lumen Output 流明数 (lm)	CRI 显色指数
8W	3000K	750lm	82
8W	6000K	800lm	82